



# SPARIBO® Spanplattenschraube RN 9267



## GEOMETRIE

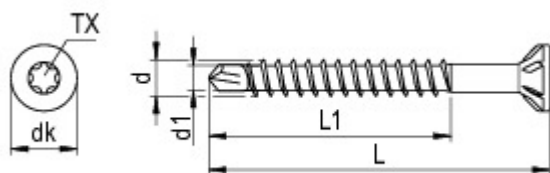


Material: Edelstahl A2  
Oberfläche: blank, gleitbeschichtet

## SORTIMENT

d [mm]	L [mm]	L1 [mm]	ETA	Antrieb	d1 [mm]	dk [mm]
4,0	35	26	•	TX 20	2,6	8,0
4,0	40	26	•	TX 20	2,6	8,0
4,0	45	28	•	TX 20	2,6	8,0
4,0	50	33	•	TX 20	2,6	8,0
4,0	60	38	•	TX 20	2,6	8,0
4,0	70	48	•	TX 20	2,6	8,0
4,0	80	48	•	TX 20	2,6	8,0
4,5	40	26	•	TX 20	3,0	9,0
4,5	45	28	•	TX 20	3,0	9,0
4,5	50	33	•	TX 20	3,0	9,0
4,5	60	38	•	TX 20	3,0	9,0
4,5	70	48	•	TX 20	3,0	9,0
4,5	80	48	•	TX 20	3,0	9,0
5,0	45	28	•	TX 25	3,7	10,0
5,0	50	33	•	TX 25	3,7	10,0
5,0	60	38	•	TX 25	3,7	10,0
5,0	70	48	•	TX 25	3,7	10,0
5,0	80	48	•	TX 25	3,7	10,0
5,0	90	58	•	TX 25	3,7	10,0
5,0	100	58	•	TX 25	3,7	10,0

# SPARIBO® Spanplattenschraube RN 9267



d [mm]	L [mm]	L1 [mm]	ETA	Antrieb	d1 [mm]	dk [mm]
6,0	80	57	•	TX 25	4,6	12,0
6,0	90	57	•	TX 25	4,6	12,0
6,0	100	66	•	TX 25	4,6	12,0
6,0	120	66	•	TX 25	4,6	12,0

## TECHNIK

Zulassung: ETA-11/0106

d [mm]	4,0	4,5	5,0	6,0
Bruchdrehmoment [Nm]	2,2	3,0	4,0	8,0
Fließmoment [Nm]	1,9	2,6	3,4	5,5
Zugtragfähigkeit [kN]	3,1	4,0	4,9	7,1

## EINSATZBEREICH

Verbindungen aus Holz und Aluminium im Innen- und Außenbereich.

Innenausbau, Rahmenverschraubungen, Zaunbau