



ETA-Danmark A/S  
Göteborg Plads 1  
DK-2150 Nordhavn  
Tel. +45 72 24 59 00  
Fax +45 72 24 59 04  
Internet [www.etadanmark.dk](http://www.etadanmark.dk)

Authorised and notified according to Article 29 of the Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011

MEMBER OF EOTA



## European Technical Assessment ETA-23/0061 of 2023/02/24

### I General Part

**Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011:** ETA-Danmark A/S

<b>Trade name of the construction product:</b>	Rotho Blaas XYLOFON flexible interlayer
<b>Product family to which the above construction product belongs:</b>	Flexible interlayer to be used for the reduction of flanking sound transmission and/or vibration transmission in construction works
<b>Manufacturer:</b>	Rotho Blaas s.r.l Via dell'Adige 2/1 IT-39040 Cortaccia (BZ) Tel. + 39 0471 818400 Fax + 39 0471 818484 Internet <a href="http://www.rothoblaas.com">www.rothoblaas.com</a>
<b>Manufacturing plant:</b>	Rotho Blaas s.r.l Manufacturing Plants: RI1 - RI2
<b>This European Technical Assessment contains:</b>	21 pages including 6 annexes which form an integral part of the document
<b>This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:</b>	EAD 042232-00-0503 Flexible interlayer to be used for the reduction of flanking sound transmission and/or vibration transmission in construction works
<b>This version replaces:</b>	-

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

## **II    SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT**

### **1    Technical description of product**

Rotho Blaas "XYLOFON 35", "XYLOFON 50", "XYLOFON 70", "XYLOFON 80", "XYLOFON90" are flexible interlayers made of a homogeneous viscoelastic layer of centrifuged monolithic polyurethane.

The product has a thickness of 6 mm and it can be placed on market as stripe, mat, washer or other shape. The product is delivered with different shore hardness and different compressive modulus according to the values declared at point 3.2.

### **2    Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)**

Rotho Blaas XYLOFON flexible interlayer is used as flexible interlayer for the reduction of flanking transmission for airborne, impact and building service equipment sound between adjoining rooms frame and/or vibration transmission. The product is installed between at least two elements (i.e., floor and wall).

Rotho Blaas XYLOFON flexible interlayer shall be used in environmental not subjected to direct contact with weathering or wetting. Typically, the product is installed inside the construction works such as timber structures subject to the dry, internal conditions defined by the service classes 1 and 2 of EN 1995-1-1 (Eurocode 5).

The installation shall be carried out in accordance with nation provisions. Instructions from Rotho Blaas should be considered for installation.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the interlayers of 25 years. The real working life may be, in normal use conditions, considerably longer without major degradation affecting the basic requirements for works.

The indications given on the working life cannot be interpreted as a guarantee given by the manufacturer or Assessment Body, but are to be regarded only as a means

for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic															
<b>3.1 Safety in case of fire (BWR2)</b>																
Reaction to fire	XYLOFON is made from centrifuged polyurethane and classified as Euroclass E in accordance with EN 13501-1 and Commission Delegated Regulation 2016/364															
<b>3.2 Protection against noise *) (BWR5)</b>																
Compressive creep	See Annex A															
Compression set	See Annex B															
Compressive stress and deformation	See Annex C															
Dynamic elastic modulus	See Annex D															
Damping factor	See Annex E															
Flanking transmission for airborne, impact and building service equipment sound between adjoining rooms frame	See Annex F															
Compressive modulus	<table border="1"><tbody><tr><td>XYLOFON 35</td><td><math>E_c = 3,22 \text{ MPa}</math></td><td><math>E_{c,lubricant} = 1,74 \text{ MPa}</math></td></tr><tr><td>XYLOFON 50</td><td><math>E_c = 7,11 \text{ MPa}</math></td><td><math>E_{c,lubricant} = 2,89 \text{ MPa}</math></td></tr><tr><td>XYLOFON 70</td><td><math>E_c = 14,18 \text{ MPa}</math></td><td><math>E_{c,lubricant} = 7,26 \text{ MPa}</math></td></tr><tr><td>XYLOFON 80</td><td><math>E_c = 25,39 \text{ MPa}</math></td><td><math>E_{c,lubricant} = 13,18 \text{ MPa}</math></td></tr><tr><td>XYLOFON 90</td><td><math>E_c = 36,56 \text{ MPa}</math></td><td><math>E_{c,lubricant} = 21,91 \text{ MPa}</math></td></tr></tbody></table>	XYLOFON 35	$E_c = 3,22 \text{ MPa}$	$E_{c,lubricant} = 1,74 \text{ MPa}$	XYLOFON 50	$E_c = 7,11 \text{ MPa}$	$E_{c,lubricant} = 2,89 \text{ MPa}$	XYLOFON 70	$E_c = 14,18 \text{ MPa}$	$E_{c,lubricant} = 7,26 \text{ MPa}$	XYLOFON 80	$E_c = 25,39 \text{ MPa}$	$E_{c,lubricant} = 13,18 \text{ MPa}$	XYLOFON 90	$E_c = 36,56 \text{ MPa}$	$E_{c,lubricant} = 21,91 \text{ MPa}$
XYLOFON 35	$E_c = 3,22 \text{ MPa}$	$E_{c,lubricant} = 1,74 \text{ MPa}$														
XYLOFON 50	$E_c = 7,11 \text{ MPa}$	$E_{c,lubricant} = 2,89 \text{ MPa}$														
XYLOFON 70	$E_c = 14,18 \text{ MPa}$	$E_{c,lubricant} = 7,26 \text{ MPa}$														
XYLOFON 80	$E_c = 25,39 \text{ MPa}$	$E_{c,lubricant} = 13,18 \text{ MPa}$														
XYLOFON 90	$E_c = 36,56 \text{ MPa}$	$E_{c,lubricant} = 21,91 \text{ MPa}$														

\*) Values may be subject to production tolerances.

## **4 Attestation and verification of constancy of performance (AVCP)**


### **4.1 AVCP system**

According to the decision 2000/273/EC as amended by 2001/596/EC of the European Commission<sup>1</sup>, as amended, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 3.

## **5 Technical details necessary for the implementation of the AVCP system, as foreseen in the applicable EAD**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking.

Issued in Copenhagen on 2023-02-24 by



Thomas Bruun  
Managing Director, ETA-Danmark

### Annex A Compressive creep

Table A.1

Product	$\frac{\Delta \varepsilon}{\varepsilon_1}$	Description
XYLOFON 35	0,54	
XYLOFON 50	0,53	
XYLOFON 70	2,9	
XYLOFON 80	10,3	
XYLOFON 90	0,28	

Where:

- $\frac{\Delta \varepsilon}{\varepsilon_1}$  is the mean value of the creep index in compression.
- the description of the long-term deformation is determined according with Annex A of EN ISO 16534 using the values (deformation and time) determined with ISO 8013 with the assessment specification above and the result shall be expressed as Figure B1 of Annex B of EN ISO 16534.

**Annex B**  
**Compression set**

Table B.1

Product	c.s.	t [mm]	t <sub>c.s.</sub> [mm]
XYLOFON 35	0,72 %	6	5,96
XYLOFON 50	1,25 %	6	5,93
XYLOFON 70	0,71 %	6	5,96
XYLOFON 80	1,31 %	6	5,92
XYLOFON 90	2,02 %	6	5,88

Where:

- c.s. is the difference between the initial thickness and the final thickness of a test piece of product after compression for a given time at a given temperature and after a given recovery time defined at point 8 of EN 1856.
- t [mm] is the nominal thickness of the product.
- t<sub>c.s.</sub>[mm] is the calculated thickness of the product after compression and recovery.

**Annex C**  
**Compressive stress and deformation**

Table C.1

Product	$\sigma_{1\text{mm}}$ [MPa]	$\sigma_{2\text{mm}}$ [MPa]	$\sigma_{3\text{mm}}$ [MPa]
	$\sigma_{1\text{mm, lubricant}}$ [MPa]	$\sigma_{2\text{mm, lubricant}}$ [MPa]	$\sigma_{3\text{mm, lubricant}}$ [MPa]
XYLOFON 35	0,5	1,54	3,61
	0,28	0,74	1,58
XYLOFON 50	1,11	3,50	8,59
	0,46	1,22	2,58
XYLOFON 70	2,44	5,43	11,10
	1,15	2,97	6,04
XYLOFON 80	3,85	9,52	19,51
	2,14	5,15	9,83
XYLOFON 90	5,83	14,41	28,97
	3,44	7,99	14,87

Where:

- $\sigma_{1\text{mm}}$  [MPa] is the mean value of compressive stress at 1 mm strain (surfaces not treated with lubricant).
- $\sigma_{1\text{mm, lubricant}}$  [MPa] is the mean value of compressive stress at 1 mm strain (surfaces treated with appropriate lubricant).
- $\sigma_{2\text{mm}}$  [MPa] is the mean value of compressive stress at 2 mm strain (surfaces not treated with lubricant).
- $\sigma_{2\text{mm, lubricant}}$  [MPa] is the mean value of compressive stress at 2 mm strain (surfaces treated with appropriate lubricant).
- $\sigma_{3\text{mm}}$  [MPa] is the mean value of compressive stress at 3 mm strain (surfaces not treated with lubricant).
- $\sigma_{3\text{mm, lubricant}}$  [MPa] is the mean value of compressive stress at 3 mm strain (surfaces treated with appropriate lubricant).

**Annex D**  
**Dynamic elastic modulus**

Table D.1

Product	E'₁Hz [MPa]	E'₅Hz [MPa]	E'₁₀Hz [MPa]	E'₅₀Hz [MPa]
	E''₁Hz [MPa]	E''₅Hz [MPa]	E''₁₀Hz [MPa]	E''₅₀Hz [MPa]
XYLOFON 35	2,79	3,10	3,28	3,60
	0,77	1,00	1,09	1,38
XYLOFON 50	4,64	3,93	4,09	4,36
	0,55	0,68	0,73	0,98
XYLOFON 70	6,00	6,44	6,87	7,87
	0,47	0,77	1,03	2,22
XYLOFON 80	15,44	16,90	18,02	21,81
	1,52	2,54	3,34	6,88
XYLOFON 90	32,2	39,89	45,37	65,72
	6,9	12,23	16,04	29,78

Where:

- E'₁Hz [MPa] is the mean value of elastic normal modulus (storage normal modulus) at 1 Hz.
- E''₁Hz [MPa] is the mean value of loss normal modulus at 1 Hz.
- E'₅Hz [MPa] is the mean value of elastic normal modulus (storage normal modulus) at 5 Hz.
- E''₅Hz [MPa] is the mean value of loss normal modulus at 5 Hz.
- E'₁₀Hz [MPa] is the mean value of elastic normal modulus (storage normal modulus) at 10 Hz.
- E''₁₀Hz [MPa] is the mean value of loss normal modulus at 10 Hz.
- E'₅₀Hz [MPa] is the mean value of elastic normal modulus (storage normal modulus) at 50 Hz.
- E''₅₀Hz [MPa] is the mean value of loss normal modulus at 50 Hz.

**Annex E**  
**Damping factor**


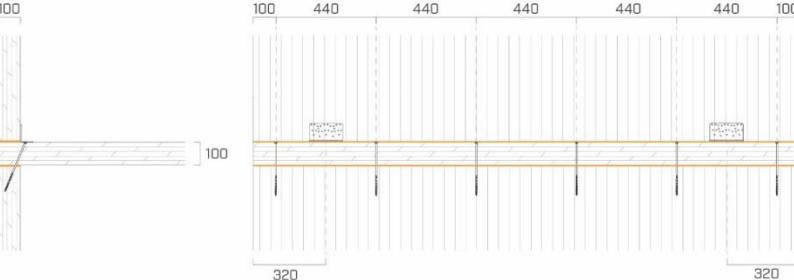
Table E.1


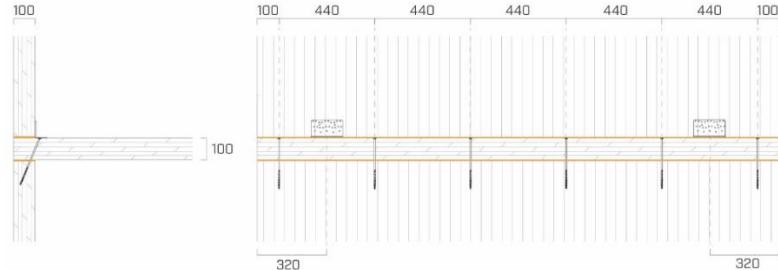
Product	$\tan \delta_{1\text{Hz}}$ [MPa]	$\tan \delta_{5\text{Hz}}$ [MPa]	$\tan \delta_{10\text{Hz}}$ [MPa]	$\tan \delta_{50\text{Hz}}$ [MPa]
XYLOFON 35	0,276	0,321	0,332	0,382
XYLOFON 50	0,153	0,173	0,178	0,225
XYLOFON 70	0,077	0,118	0,148	0,282
XYLOFON 80	0,099	0,15	0,185	0,315
XYLOFON 90	0,214	0,307	0,354	0,453

Where:

- $\tan \delta_{1\text{Hz}}$  [MPa] is the mean value of tangent of the loss angle at 1 Hz.
- $\tan \delta_{5\text{Hz}}$  [MPa] is the mean value of tangent of the loss angle at 5 Hz.
- $\tan \delta_{10\text{Hz}}$  [MPa] is the mean value of tangent of the loss angle at 10 Hz.
- $\tan \delta_{50\text{Hz}}$  [MPa] is the mean value of tangent of the loss angle at 50 Hz.

**Annex F**  
**Flanking transmission for airborne, impact and building service equipment sound between adjoining rooms**  
**Frame**

Joint type	Joint description	System drawing																																																																																																												
1 T-joint	<p><b>Standard:</b> EN ISO 10848-1/4</p> <p><b>Tested build-up:</b></p> <ul style="list-style-type: none"> <li>- (4) Top wall: 5-ply CLT, 100 mm, (2,4 m x 3 m)</li> <li>- (1) Floor: 5-ply CLT 100 mm (2,4 m x 3,5 m)</li> <li>- (2) Bottom wall: 5-ply CLT, 100mm, (2,4 m x 3 m)</li> </ul> <p><b>Fastening system:</b></p> <ul style="list-style-type: none"> <li>- 6 Partially threaded screws HBS 8x240mm; step 440mm</li> <li>- 2 Angle brackets NINO15080 (CLT pattern with 31 screws 5x50 mm) + XYLOFON 35 (55x150x6 mm); step 1760mm</li> </ul>	 <p>Executive drawing of the junction constructed for the test build up.</p>  <p>Executive drawings of the positioning of fastening system and resilient interlayers</p>																																																																																																												
	<p><b>Flexible interlayer:</b></p> <ul style="list-style-type: none"> <li>- Product: XYLOFON 35</li> <li>- Position: between top wall and floor and between floor and bottom wall.</li> <li>- Dimensions: width=100mm thickness=6mm length=2,40m</li> <li>- Contact area: continuous stripe (same width and length of the wall)</li> <li>- Load applied [N/m<sup>2</sup>]: 210000</li> </ul>	<p><b>Measurements and results:</b></p> <p>Path: 1-4</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>21,0</td><td>20,1</td><td>16,1</td><td>19,9</td><td>17,5</td><td>21,4</td><td>24,4</td><td>17,7</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>20,9</td><td>17,6</td><td>17,9</td><td>19,2</td><td>20,7</td><td>18,2</td><td>18,5</td><td>21,7</td></tr> </tbody> </table> $\overline{K_{14}} = 19,4 \text{ dB} \quad \overline{K_{14,0}} = 13,3 \text{ dB}$ $\Delta_{1,14} = 6,1 \text{ dB}$ <p>Path: 1-2</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>21,7</td><td>24,6</td><td>17,2</td><td>20,0</td><td>21,1</td><td>20,5</td><td>20,0</td><td>20,9</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>21,8</td><td>22,6</td><td>20,7</td><td>22,4</td><td>27,0</td><td>21,8</td><td>22,3</td><td>27,4</td></tr> </tbody> </table> $\overline{K_{12}} = 21,6 \text{ dB} \quad \overline{K_{12,0}} = 14,5 \text{ dB}$ $\Delta_{1,12} = 7,1 \text{ dB}$ <p>Path: 2-4</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>18,9</td><td>29,2</td><td>23,3</td><td>22,6</td><td>24,2</td><td>22,5</td><td>22,0</td><td>20,2</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>22,6</td><td>22,0</td><td>24,7</td><td>25,8</td><td>32,0</td><td>29,9</td><td>28,5</td><td>29,6</td></tr> </tbody> </table> $\overline{K_{24}} = 24,7 \text{ dB} \quad \overline{K_{24,0}} = 17,3 \text{ dB}$ $\Delta_{1,24} = 7,4 \text{ dB}$	F (Hz)	100	125	160	200	250	315	400	500	K <sub>14</sub> (dB)	21,0	20,1	16,1	19,9	17,5	21,4	24,4	17,7	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>14</sub> (dB)	20,9	17,6	17,9	19,2	20,7	18,2	18,5	21,7	F (Hz)	100	125	160	200	250	315	400	500	K <sub>12</sub> (dB)	21,7	24,6	17,2	20,0	21,1	20,5	20,0	20,9	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>12</sub> (dB)	21,8	22,6	20,7	22,4	27,0	21,8	22,3	27,4	F (Hz)	100	125	160	200	250	315	400	500	K <sub>24</sub> (dB)	18,9	29,2	23,3	22,6	24,2	22,5	22,0	20,2	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>24</sub> (dB)	22,6	22,0	24,7	25,8	32,0	29,9	28,5	29,6
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>14</sub> (dB)	21,0	20,1	16,1	19,9	17,5	21,4	24,4	17,7																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>14</sub> (dB)	20,9	17,6	17,9	19,2	20,7	18,2	18,5	21,7																																																																																																						
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>12</sub> (dB)	21,7	24,6	17,2	20,0	21,1	20,5	20,0	20,9																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>12</sub> (dB)	21,8	22,6	20,7	22,4	27,0	21,8	22,3	27,4																																																																																																						
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>24</sub> (dB)	18,9	29,2	23,3	22,6	24,2	22,5	22,0	20,2																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>24</sub> (dB)	22,6	22,0	24,7	25,8	32,0	29,9	28,5	29,6																																																																																																						


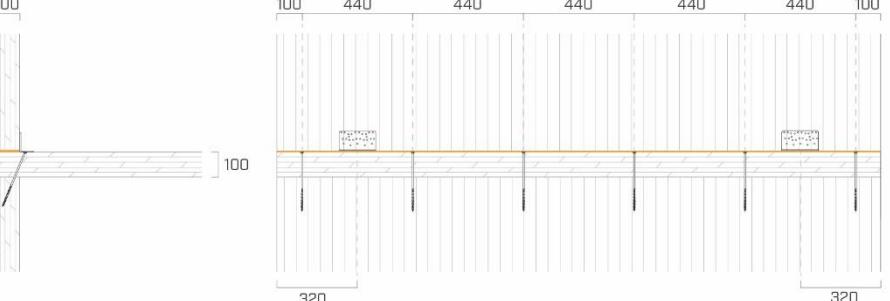
Joint type	Joint description	System drawing																																																																								
2 T-joint	<b>Standard:</b> EN ISO 10848-1/4																																																																									
	<b>Tested build-up:</b> <ul style="list-style-type: none"> <li>(4) Top wall: 5-ply CLT, 100 mm, (2,4 m x 3 m)</li> <li>(1) Floor: 5-ply CLT, 100 mm (2,4 m x 3,5 m)</li> <li>(2) Bottom wall: 5-ply CLT, 100mm, (2,4 m x 3 m)</li> </ul> <b>Fastening system:</b> <ul style="list-style-type: none"> <li>6 Partially threaded screws HBS 8x240mm; step 440mm</li> <li>2 Angle brackets NINO15080 (CLT pattern with 31 screws 5x50 mm) + XYLOFON 35 (55x150x6 mm); step 1760mm</li> </ul>	<p>Executive drawing of the junction constructed for the test build up.</p>  <p>Executive drawings of the positioning of fastening system and resilient interlayers</p>																																																																								
	<b>Flexible interlayer:</b> <ul style="list-style-type: none"> <li>Product: XYLOFON 35</li> <li>Position: between top wall and floor and between floor and bottom wall.</li> <li>Dimensions: width=100mm thickness=6mm length=2,40m</li> <li>Contact area: continuous stripe (same width and length of the wall)</li> <li>Load applied: self weight of the structure</li> </ul>	<p><b>Measurements and results:</b></p> <p>Path: 1-4</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>12,5</td><td>19,6</td><td>10,5</td><td>13,7</td><td>14,8</td><td>16,7</td><td>19,0</td><td>17,6</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>16,7</td><td>18,5</td><td>21,3</td><td>22,8</td><td>23,2</td><td>18,8</td><td>19,8</td><td>20,5</td></tr> </tbody> </table> <p><math>\bar{K}_{14} = 17,9 \text{ dB}</math>      <math>\bar{K}_{14,0} = 14,4 \text{ dB}</math></p> <p><math>\Delta l_{14} = 3,5 \text{ dB}</math></p> <p>Path: 1-2</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>18,2</td><td>21,3</td><td>12,3</td><td>15,3</td><td>17,3</td><td>17,6</td><td>20,7</td><td>20,1</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>23,6</td><td>22,3</td><td>22,3</td><td>23,2</td><td>24,0</td><td>24,3</td><td>22,0</td><td>24,1</td></tr> </tbody> </table> <p><math>\bar{K}_{12} = 20,3 \text{ dB}</math>      <math>\bar{K}_{12,0} = 14,6 \text{ dB}</math></p> <p><math>\Delta l_{12} = 5,7 \text{ dB}</math></p>	F (Hz)	100	125	160	200	250	315	400	500	K <sub>14</sub> (dB)	12,5	19,6	10,5	13,7	14,8	16,7	19,0	17,6	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>14</sub> (dB)	16,7	18,5	21,3	22,8	23,2	18,8	19,8	20,5	F (Hz)	100	125	160	200	250	315	400	500	K <sub>12</sub> (dB)	18,2	21,3	12,3	15,3	17,3	17,6	20,7	20,1	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>12</sub> (dB)	23,6	22,3	22,3	23,2	24,0	24,3	22,0	24,1
F (Hz)	100	125	160	200	250	315	400	500																																																																		
K <sub>14</sub> (dB)	12,5	19,6	10,5	13,7	14,8	16,7	19,0	17,6																																																																		
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																		
K <sub>14</sub> (dB)	16,7	18,5	21,3	22,8	23,2	18,8	19,8	20,5																																																																		
F (Hz)	100	125	160	200	250	315	400	500																																																																		
K <sub>12</sub> (dB)	18,2	21,3	12,3	15,3	17,3	17,6	20,7	20,1																																																																		
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																		
K <sub>12</sub> (dB)	23,6	22,3	22,3	23,2	24,0	24,3	22,0	24,1																																																																		
		<p>Path: 2-4</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>11,8</td><td>25,9</td><td>16,1</td><td>23,5</td><td>21,1</td><td>25,4</td><td>23,9</td><td>23,6</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>26,2</td><td>27,5</td><td>32,6</td><td>34,1</td><td>33,2</td><td>35,0</td><td>34,7</td><td>32,0</td></tr> </tbody> </table> <p><math>\bar{K}_{24} = 26,8 \text{ dB}</math>      <math>\bar{K}_{24,0} = 20,4 \text{ dB}</math></p> <p><math>\Delta l_{24} = 6,4 \text{ dB}</math></p>	F (Hz)	100	125	160	200	250	315	400	500	K <sub>24</sub> (dB)	11,8	25,9	16,1	23,5	21,1	25,4	23,9	23,6	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>24</sub> (dB)	26,2	27,5	32,6	34,1	33,2	35,0	34,7	32,0																																				
F (Hz)	100	125	160	200	250	315	400	500																																																																		
K <sub>24</sub> (dB)	11,8	25,9	16,1	23,5	21,1	25,4	23,9	23,6																																																																		
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																		
K <sub>24</sub> (dB)	26,2	27,5	32,6	34,1	33,2	35,0	34,7	32,0																																																																		


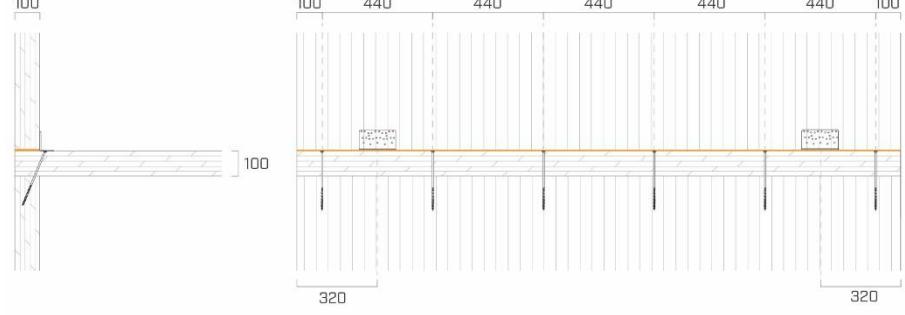
Joint type	Joint description	System drawing																																																																																																												
3 T-joint	<b>Standard:</b> EN ISO 10848-1/4																																																																																																													
	<b>Tested build-up:</b> <ul style="list-style-type: none"> <li>- (4) Top wall: 5-ply CLT, 100 mm, (2,4 m x 3 m)</li> <li>- (1) Floor: 5-ply CLT, 100 mm (2,4 m x 3,5 m)</li> <li>- (4) Bottom wall: 5-ply CLT, 100mm, (2,4 m x 3 m)</li> </ul>	<p>Executive drawing of the junction constructed for the test build up.</p>																																																																																																												
	<b>Fastening system:</b> <ul style="list-style-type: none"> <li>- 6 HBS Partially threaded screws 8x240mm; step 440mm</li> <li>- 2 Angle brackets NINO15080 (CLT pattern with 31 screws 5x50 mm) + XYLOFON 35 (55x150x6 mm); step 1760mm</li> </ul>	<p>Executive drawings of the positioning of fastening system and resilient interlayers</p>																																																																																																												
	<b>Flexible interlayer:</b> <ul style="list-style-type: none"> <li>- Product: XYLOFON 35</li> <li>- Position: between top wall and floor</li> <li>- Dimensions: width=100mm thickness=6mm length=2,40m</li> <li>- Contact area: continuous stripe (same width and length of the wall)</li> <li>- Load applied [N/m²]: 210000</li> </ul>	<p><b>Measurements and results:</b></p> <p>Path: 1-4</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th> </tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>20,9</td><td>19,3</td><td>20,5</td><td>20,4</td><td>16,4</td><td>21,4</td><td>26,2</td><td>19,1</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th> </tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>21,6</td><td>17,7</td><td>18,9</td><td>21,6</td><td>20,1</td><td>17,7</td><td>18,3</td><td>20,1</td> </tr> </tbody> </table> <p><math>\overline{K_{14}} = 20,1 \text{ dB}</math>      <math>\overline{K_{14,0}} = 13,3 \text{ dB}</math></p> <p><math>\Delta_{l,14} = 6,8 \text{ dB}</math></p> <p>Path: 1-2</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th> </tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>20,1</td><td>18,3</td><td>12,5</td><td>10,2</td><td>13,3</td><td>10,6</td><td>13,9</td><td>10,7</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th> </tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>14,6</td><td>11,1</td><td>9,6</td><td>13,2</td><td>17,3</td><td>14,8</td><td>17,9</td><td>21,1</td> </tr> </tbody> </table> <p><math>\overline{K_{12}} = 13,1 \text{ dB}</math>      <math>\overline{K_{12,0}} = 14,5 \text{ dB}</math></p> <p><math>\Delta_{l,12} = -1,4 \text{ dB}</math></p> <p>Path: 2-4</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th> </tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>20,4</td><td>25,7</td><td>23,2</td><td>20,7</td><td>22,1</td><td>24,3</td><td>24,6</td><td>20,5</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th> </tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>22,5</td><td>20,9</td><td>22,2</td><td>23,9</td><td>27,5</td><td>27,8</td><td>28,3</td><td>28,1</td> </tr> </tbody> </table> <p><math>\overline{K_{24}} = 23,5 \text{ dB}</math>      <math>\overline{K_{24,0}} = 17,3 \text{ dB}</math></p> <p><math>\Delta_{l,24} = 6,2 \text{ dB}</math></p>	F (Hz)	100	125	160	200	250	315	400	500	K <sub>14</sub> (dB)	20,9	19,3	20,5	20,4	16,4	21,4	26,2	19,1	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>14</sub> (dB)	21,6	17,7	18,9	21,6	20,1	17,7	18,3	20,1	F (Hz)	100	125	160	200	250	315	400	500	K <sub>12</sub> (dB)	20,1	18,3	12,5	10,2	13,3	10,6	13,9	10,7	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>12</sub> (dB)	14,6	11,1	9,6	13,2	17,3	14,8	17,9	21,1	F (Hz)	100	125	160	200	250	315	400	500	K <sub>24</sub> (dB)	20,4	25,7	23,2	20,7	22,1	24,3	24,6	20,5	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>24</sub> (dB)	22,5	20,9	22,2	23,9	27,5	27,8	28,3	28,1
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>14</sub> (dB)	20,9	19,3	20,5	20,4	16,4	21,4	26,2	19,1																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>14</sub> (dB)	21,6	17,7	18,9	21,6	20,1	17,7	18,3	20,1																																																																																																						
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>12</sub> (dB)	20,1	18,3	12,5	10,2	13,3	10,6	13,9	10,7																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>12</sub> (dB)	14,6	11,1	9,6	13,2	17,3	14,8	17,9	21,1																																																																																																						
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>24</sub> (dB)	20,4	25,7	23,2	20,7	22,1	24,3	24,6	20,5																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>24</sub> (dB)	22,5	20,9	22,2	23,9	27,5	27,8	28,3	28,1																																																																																																						






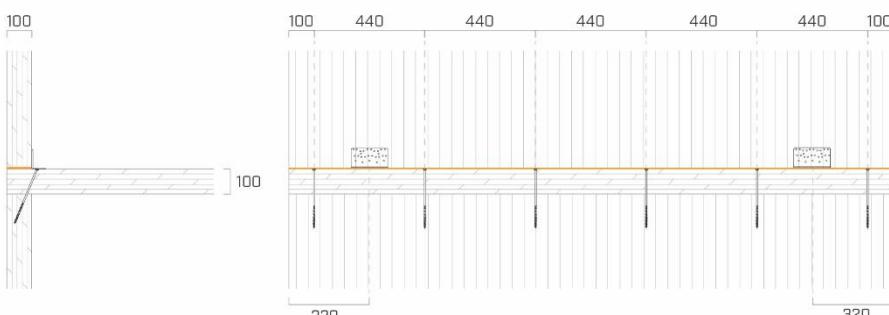
Joint type	Joint description	System drawing																																																																																																												
6 T-joint	<b>Standard:</b> EN ISO 10848-1/4 <p><b>Tested build-up:</b></p> <ul style="list-style-type: none"> <li>- (4) Top wall: 5-ply CLT, 100 mm, (2,4 m x 3 m)</li> <li>- (1) Floor: 5-ply CLT, 100 mm (2,4 m x 3,5 m)</li> <li>- (2) Bottom wall: 5-ply CLT, 100mm, (2,4 m x 3 m)</li> </ul> <p><b>Fastening system:</b></p> <ul style="list-style-type: none"> <li>- 6 Partially threaded screws HBS 8x240mm; step 440mm</li> <li>- 2 Angle brackets NINO15080 (CLT pattern with 31 screws 5x50 mm) + XYLOFON 35 (55x150x6 mm); step 1760mm</li> </ul>	<p>Executive drawing of the junction constructed for the test build up.</p> <p>Executive drawings of the positioning of fastening system and resilient interlayers</p>																																																																																																												
	<b>Flexible interlayer:</b> <ul style="list-style-type: none"> <li>- Product: XYLOFON 50</li> <li>- Position: between top wall and floor and between floor and bottom wall.</li> <li>- Dimensions: width=100mm thickness=6mm length=2,40m</li> <li>- Contact area: continuous stripe (same width and length of the wall)</li> <li>- Load applied: self weight of the structure</li> </ul>	<p><b>Measurements and results:</b></p> <p>Path: 1-4</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>12,3</td><td>18,4</td><td>17,0</td><td>19,7</td><td>15,3</td><td>19,3</td><td>23,6</td><td>20,5</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>22,2</td><td>19,9</td><td>23,6</td><td>24,5</td><td>24,6</td><td>22,4</td><td>21,8</td><td>20,5</td></tr> </tbody> </table> <p><math>\bar{K}_{14} = 20,8 \text{ dB}</math>      <math>\bar{K}_{14,0} = 14,4 \text{ dB}</math></p> <p><math>\Delta_{l,14} = 6,4 \text{ dB}</math></p> <p>Path: 1-2</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>15,5</td><td>19,2</td><td>15,8</td><td>18,1</td><td>19,0</td><td>19,4</td><td>20,9</td><td>18,3</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>18,8</td><td>20,3</td><td>20,4</td><td>23,7</td><td>25,0</td><td>24,1</td><td>21,3</td><td>23,5</td></tr> </tbody> </table> <p><math>\bar{K}_{12} = 20,2 \text{ dB}</math>      <math>\bar{K}_{12,0} = 14,6 \text{ dB}</math></p> <p><math>\Delta_{l,12} = 5,6 \text{ dB}</math></p> <p>Path: 2-4</p> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>12,3</td><td>25,0</td><td>20,2</td><td>26,9</td><td>23,5</td><td>27,7</td><td>27,0</td><td>27,0</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>28,8</td><td>30,5</td><td>33,5</td><td>36,0</td><td>35,9</td><td>38,7</td><td>36,1</td><td>31,6</td></tr> </tbody> </table> <p><math>\bar{K}_{24} = 29,3 \text{ dB}</math>      <math>\bar{K}_{24,0} = 20,4 \text{ dB}</math></p> <p><math>\Delta_{l,24} = 8,9 \text{ dB}</math></p>	F (Hz)	100	125	160	200	250	315	400	500	K <sub>14</sub> (dB)	12,3	18,4	17,0	19,7	15,3	19,3	23,6	20,5	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>14</sub> (dB)	22,2	19,9	23,6	24,5	24,6	22,4	21,8	20,5	F (Hz)	100	125	160	200	250	315	400	500	K <sub>12</sub> (dB)	15,5	19,2	15,8	18,1	19,0	19,4	20,9	18,3	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>12</sub> (dB)	18,8	20,3	20,4	23,7	25,0	24,1	21,3	23,5	F (Hz)	100	125	160	200	250	315	400	500	K <sub>24</sub> (dB)	12,3	25,0	20,2	26,9	23,5	27,7	27,0	27,0	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>24</sub> (dB)	28,8	30,5	33,5	36,0	35,9	38,7	36,1	31,6
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>14</sub> (dB)	12,3	18,4	17,0	19,7	15,3	19,3	23,6	20,5																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>14</sub> (dB)	22,2	19,9	23,6	24,5	24,6	22,4	21,8	20,5																																																																																																						
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>12</sub> (dB)	15,5	19,2	15,8	18,1	19,0	19,4	20,9	18,3																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>12</sub> (dB)	18,8	20,3	20,4	23,7	25,0	24,1	21,3	23,5																																																																																																						
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>24</sub> (dB)	12,3	25,0	20,2	26,9	23,5	27,7	27,0	27,0																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>24</sub> (dB)	28,8	30,5	33,5	36,0	35,9	38,7	36,1	31,6																																																																																																						

Joint type	Joint description	System drawing																																																																																																												
7 T-joint	<b>Standard:</b> EN ISO 10848-1/4  <b>Tested build-up:</b> <ul style="list-style-type: none"> <li>- (4) Top wall: 5-ply CLT, 100 mm, (2,4 m x 3 m)</li> <li>- (1) Floor: 5-ply CLT, 100 mm(2,4 m x 3,5 m)</li> <li>- (2) Bottom wall: 5-ply CLT, 100mm, (2,4 m x 3 m)</li> </ul>	 <p>Executive drawing of the junction constructed for the test build up.</p>																																																																																																												
	<b>Fastening system:</b> <ul style="list-style-type: none"> <li>- 6 Partially threaded screws HBS 8x240mm; step 440mm</li> <li>- 2 Angle brackets NINO15080 (CLT pattern with 31 screws 5x50 mm) + XYLOFON 35 (55x150x6 mm); step 1760mm</li> </ul>	 <p>Executive drawings of the positioning of fastening system and resilient interlayers</p>																																																																																																												
	<b>Flexible interlayer:</b> <ul style="list-style-type: none"> <li>- Product: XYLOFON 50</li> <li>- Position: between top wall and floor.</li> <li>- Dimensions: width=100mm thickness=6mm length=2,40m</li> <li>- Contact area: continuous stripe (same width and length of the wall)</li> <li>- Load applied [N/m<sup>2</sup>]: 338000</li> </ul>	<p><b>Measurements and results:</b></p> <p>Path: 1-4</p> <table border="1" data-bbox="504 1140 1251 1192"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>19,4</td><td>18,3</td><td>20,6</td><td>27,4</td><td>19,4</td><td>23,9</td><td>25,0</td><td>17,1</td></tr> </tbody> </table> <table border="1" data-bbox="504 1226 1251 1277"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>19,3</td><td>20,4</td><td>19,6</td><td>20,6</td><td>22,8</td><td>17,3</td><td>18,4</td><td>21,1</td></tr> </tbody> </table> <p><math>\overline{K_{14}} = 20,9 \text{ dB}</math>      <math>\overline{K_{14,0}} = 13,3 \text{ dB}</math></p> <p><math>\Delta_{l,14} = 7,6 \text{ dB}</math></p> <p>Path: 1-2</p> <table border="1" data-bbox="504 1473 1251 1525"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>15,8</td><td>13,8</td><td>8,9</td><td>9,4</td><td>13,8</td><td>10,5</td><td>13,8</td><td>10,2</td></tr> </tbody> </table> <table border="1" data-bbox="504 1558 1251 1610"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>11,7</td><td>11,0</td><td>10,1</td><td>13,0</td><td>15,9</td><td>14,9</td><td>16,8</td><td>19,9</td></tr> </tbody> </table> <p><math>\overline{K_{12}} = 12,1 \text{ dB}</math>      <math>\overline{K_{12,0}} = 14,5 \text{ dB}</math></p> <p><math>\Delta_{l,12} = -2,4 \text{ dB}</math></p> <p>Path: 2-4</p> <table border="1" data-bbox="504 1792 1251 1843"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>18,2</td><td>23,7</td><td>23,2</td><td>28,0</td><td>26,4</td><td>24,5</td><td>24,4</td><td>19,6</td></tr> </tbody> </table> <table border="1" data-bbox="504 1877 1251 1929"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>20,2</td><td>23,0</td><td>21,0</td><td>25,7</td><td>26,4</td><td>29,3</td><td>30,3</td><td>28,2</td></tr> </tbody> </table> <p><math>\overline{K_{24}} = 24,3 \text{ dB}</math>      <math>\overline{K_{24,0}} = 17,3 \text{ dB}</math></p> <p><math>\Delta_{l,24} = 7 \text{ dB}</math></p>	F (Hz)	100	125	160	200	250	315	400	500	K <sub>14</sub> (dB)	19,4	18,3	20,6	27,4	19,4	23,9	25,0	17,1	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>14</sub> (dB)	19,3	20,4	19,6	20,6	22,8	17,3	18,4	21,1	F (Hz)	100	125	160	200	250	315	400	500	K <sub>12</sub> (dB)	15,8	13,8	8,9	9,4	13,8	10,5	13,8	10,2	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>12</sub> (dB)	11,7	11,0	10,1	13,0	15,9	14,9	16,8	19,9	F (Hz)	100	125	160	200	250	315	400	500	K <sub>24</sub> (dB)	18,2	23,7	23,2	28,0	26,4	24,5	24,4	19,6	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>24</sub> (dB)	20,2	23,0	21,0	25,7	26,4	29,3	30,3	28,2
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>14</sub> (dB)	19,4	18,3	20,6	27,4	19,4	23,9	25,0	17,1																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>14</sub> (dB)	19,3	20,4	19,6	20,6	22,8	17,3	18,4	21,1																																																																																																						
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>12</sub> (dB)	15,8	13,8	8,9	9,4	13,8	10,5	13,8	10,2																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>12</sub> (dB)	11,7	11,0	10,1	13,0	15,9	14,9	16,8	19,9																																																																																																						
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>24</sub> (dB)	18,2	23,7	23,2	28,0	26,4	24,5	24,4	19,6																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>24</sub> (dB)	20,2	23,0	21,0	25,7	26,4	29,3	30,3	28,2																																																																																																						

Joint type	Joint description	System drawing																																																																																																												
8 T-joint	<p><b>Standard:</b> EN ISO 10848-1/4</p> <p><b>Tested build-up:</b></p> <ul style="list-style-type: none"> <li>- (4) Top wall: 5-ply CLT, 100 mm, (2,4 m x 3 m)</li> <li>- (1) Floor: 5-ply CLT, 100 mm, (2,4 m x 3,5 m)</li> <li>- (2) Bottom wall: 5-ply CLT, 100mm, (2,4 m x 3 m)</li> </ul> <p><b>Fastening system:</b></p> <ul style="list-style-type: none"> <li>- 6 Partially threaded screws HBS 8x240mm; step 440mm</li> <li>- 2 Angle brackets NINO15080 (CLT pattern with 31 screws 5x50 mm) + XYLOFON 35 (55x150x6 mm); step 1760mm</li> </ul>	 <p>Executive drawing of the junction constructed for the test build up.</p>  <p>Executive drawings of the positioning of fastening system and resilient interlayers</p>																																																																																																												
	<p><b>Flexible interlayer:</b></p> <ul style="list-style-type: none"> <li>- Product: XYLOFON 50</li> <li>- Position: between top wall and floor.</li> <li>- Dimensions: width=100mm thickness=6mm length=2,40m</li> <li>- Contact area: continuous stripe (same width and length of the wall)</li> <li>Load applied: self weight of the structure</li> </ul>	<p><b>Measurements and results:</b></p> <p><b>Path: 1-4</b></p> <table border="1" data-bbox="500 1111 1246 1179"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>11,0</td><td>14,4</td><td>16,0</td><td>17,2</td><td>17,3</td><td>19,8</td><td>23,1</td><td>20,1</td></tr> </tbody> </table> <table border="1" data-bbox="500 1201 1246 1268"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>23,5</td><td>21,7</td><td>26,9</td><td>26,6</td><td>24,5</td><td>24,6</td><td>24,1</td><td>22,0</td></tr> </tbody> </table> <p><math>\overline{K_{14}} = 21,2 \text{ dB}</math>      <math>\overline{K_{14,0}} = 14,4 \text{ dB}</math></p> <p><math>\Delta l,14 = 6,8 \text{ dB}</math></p> <p><b>Path: 1-2</b></p> <table border="1" data-bbox="500 1448 1246 1516"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>15,8</td><td>10,9</td><td>9,5</td><td>9,2</td><td>14,5</td><td>10,7</td><td>13,2</td><td>10,3</td></tr> </tbody> </table> <table border="1" data-bbox="500 1538 1246 1605"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>14,3</td><td>12,1</td><td>14,5</td><td>14,4</td><td>15,7</td><td>18,0</td><td>19,4</td><td>19,7</td></tr> </tbody> </table> <p><math>\overline{K_{12}} = 12,9 \text{ dB}</math>      <math>\overline{K_{12,0}} = 14,6 \text{ dB}</math></p> <p><math>\Delta l,12 = -1,7 \text{ dB}</math></p> <p><b>Path: 2-4</b></p> <table border="1" data-bbox="500 1763 1246 1830"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>15,2</td><td>24,5</td><td>21,2</td><td>23,8</td><td>19,6</td><td>23,0</td><td>22,6</td><td>21,9</td></tr> </tbody> </table> <table border="1" data-bbox="500 1852 1246 1920"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>26,7</td><td>26,8</td><td>31,6</td><td>26,3</td><td>29,8</td><td>34,3</td><td>34,9</td><td>31,1</td></tr> </tbody> </table> <p><math>\overline{K_{24}} = 25,5 \text{ dB}</math>      <math>\overline{K_{24,0}} = 20,4 \text{ dB}</math></p> <p><math>\Delta l,24 = 5,1 \text{ dB}</math></p>	F (Hz)	100	125	160	200	250	315	400	500	K <sub>14</sub> (dB)	11,0	14,4	16,0	17,2	17,3	19,8	23,1	20,1	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>14</sub> (dB)	23,5	21,7	26,9	26,6	24,5	24,6	24,1	22,0	F (Hz)	100	125	160	200	250	315	400	500	K <sub>12</sub> (dB)	15,8	10,9	9,5	9,2	14,5	10,7	13,2	10,3	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>12</sub> (dB)	14,3	12,1	14,5	14,4	15,7	18,0	19,4	19,7	F (Hz)	100	125	160	200	250	315	400	500	K <sub>24</sub> (dB)	15,2	24,5	21,2	23,8	19,6	23,0	22,6	21,9	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>24</sub> (dB)	26,7	26,8	31,6	26,3	29,8	34,3	34,9	31,1
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>14</sub> (dB)	11,0	14,4	16,0	17,2	17,3	19,8	23,1	20,1																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>14</sub> (dB)	23,5	21,7	26,9	26,6	24,5	24,6	24,1	22,0																																																																																																						
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>12</sub> (dB)	15,8	10,9	9,5	9,2	14,5	10,7	13,2	10,3																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>12</sub> (dB)	14,3	12,1	14,5	14,4	15,7	18,0	19,4	19,7																																																																																																						
F (Hz)	100	125	160	200	250	315	400	500																																																																																																						
K <sub>24</sub> (dB)	15,2	24,5	21,2	23,8	19,6	23,0	22,6	21,9																																																																																																						
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																																																						
K <sub>24</sub> (dB)	26,7	26,8	31,6	26,3	29,8	34,3	34,9	31,1																																																																																																						





Joint type	Joint description	System drawing																																																																								
11 T-joint	<p><b>Standard:</b> EN ISO 10848-1/4</p> <p><b>Tested build-up:</b></p> <ul style="list-style-type: none"> <li>(4) Top wall: 5-ply CLT, 100 mm, (2,4 m x 3 m)</li> <li>(1) Floor: 5-ply CLT 100 mm (2,4 m x 3,5 m)</li> <li>(2) Bottom wall: 5-ply CLT, 100mm, (2,4 m x 3 m)</li> </ul> <p><b>Fastening system:</b></p> <ul style="list-style-type: none"> <li>6 Partially threaded screws HBS 8x240mm; step 440mm</li> <li>2 Angle brackets NINO15080 (CLT pattern with 31 screws 5x50 mm) + XYLOFON 35 (55x150x6 mm); step 1760mm</li> </ul>	 <p>Executive drawing of the junction constructed for the test build up.</p>  <p>Executive drawings of the positioning of fastening system and resilient interlayers</p>																																																																								
	<p><b>Flexible interlayer:</b></p> <ul style="list-style-type: none"> <li>Product: XYLOFON 70</li> <li>Position: between top wall and floor.</li> <li>Dimensions: width=100mm thickness=6mm length=2,40m</li> <li>Contact area: continuous stripe (same width and length of the wall)</li> <li>Load applied [N/m<sup>2</sup>]: 625000</li> </ul>	<p><b>Measurements and results:</b></p> <p>Path: 1-4</p> <table border="1" data-bbox="500 1089 1246 1156"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>18,4</td><td>16,2</td><td>21,3</td><td>21,8</td><td>18,9</td><td>17,4</td><td>20,2</td><td>16,7</td></tr> </tbody> </table> <table border="1" data-bbox="500 1179 1246 1246"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>14</sub> (dB)</td><td>16,7</td><td>17,1</td><td>14,7</td><td>18,3</td><td>18,6</td><td>16,3</td><td>13,8</td><td>19,2</td></tr> </tbody> </table> <p><math>\overline{K_{14}} = 18,0 \text{ dB}</math>      <math>\overline{K_{14,0}} = 13,3 \text{ dB}</math></p> <p><math>\Delta_{l,14} = 4,7 \text{ dB}</math></p>	F (Hz)	100	125	160	200	250	315	400	500	K <sub>14</sub> (dB)	18,4	16,2	21,3	21,8	18,9	17,4	20,2	16,7	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>14</sub> (dB)	16,7	17,1	14,7	18,3	18,6	16,3	13,8	19,2																																				
F (Hz)	100	125	160	200	250	315	400	500																																																																		
K <sub>14</sub> (dB)	18,4	16,2	21,3	21,8	18,9	17,4	20,2	16,7																																																																		
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																		
K <sub>14</sub> (dB)	16,7	17,1	14,7	18,3	18,6	16,3	13,8	19,2																																																																		
		<p>Path: 1-2</p> <table border="1" data-bbox="500 1437 1246 1504"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>18,9</td><td>19,1</td><td>15,6</td><td>10,6</td><td>13,1</td><td>12,8</td><td>14,6</td><td>10,5</td></tr> </tbody> </table> <table border="1" data-bbox="500 1527 1246 1594"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>12</sub> (dB)</td><td>13,8</td><td>12,0</td><td>11,0</td><td>11,9</td><td>17,2</td><td>14,3</td><td>16,4</td><td>21,3</td></tr> </tbody> </table> <p><math>\overline{K_{12}} = 13,6 \text{ dB}</math>      <math>\overline{K_{12,0}} = 14,5 \text{ dB}</math></p> <p><math>\Delta_{l,12} = -0,9 \text{ dB}</math></p> <p>Path: 2-4</p> <table border="1" data-bbox="500 1774 1246 1841"> <thead> <tr> <th>F (Hz)</th><th>100</th><th>125</th><th>160</th><th>200</th><th>250</th><th>315</th><th>400</th><th>500</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>15,0</td><td>28,7</td><td>25,6</td><td>22,0</td><td>23,5</td><td>23,6</td><td>22,5</td><td>19,3</td></tr> </tbody> </table> <table border="1" data-bbox="500 1864 1246 1931"> <thead> <tr> <th>F (Hz)</th><th>630</th><th>800</th><th>1000</th><th>1250</th><th>1600</th><th>2000</th><th>2500</th><th>3150</th></tr> </thead> <tbody> <tr> <td>K<sub>24</sub> (dB)</td><td>18,4</td><td>21,2</td><td>22,2</td><td>22,5</td><td>24,8</td><td>27,4</td><td>29,6</td><td>29,9</td></tr> </tbody> </table> <p><math>\overline{K_{24}} = 23,2 \text{ dB}</math>      <math>\overline{K_{24,0}} = 17,3 \text{ dB}</math></p> <p><math>\Delta_{l,24} = 5,9 \text{ dB}</math></p>	F (Hz)	100	125	160	200	250	315	400	500	K <sub>12</sub> (dB)	18,9	19,1	15,6	10,6	13,1	12,8	14,6	10,5	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>12</sub> (dB)	13,8	12,0	11,0	11,9	17,2	14,3	16,4	21,3	F (Hz)	100	125	160	200	250	315	400	500	K <sub>24</sub> (dB)	15,0	28,7	25,6	22,0	23,5	23,6	22,5	19,3	F (Hz)	630	800	1000	1250	1600	2000	2500	3150	K <sub>24</sub> (dB)	18,4	21,2	22,2	22,5	24,8	27,4	29,6	29,9
F (Hz)	100	125	160	200	250	315	400	500																																																																		
K <sub>12</sub> (dB)	18,9	19,1	15,6	10,6	13,1	12,8	14,6	10,5																																																																		
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																		
K <sub>12</sub> (dB)	13,8	12,0	11,0	11,9	17,2	14,3	16,4	21,3																																																																		
F (Hz)	100	125	160	200	250	315	400	500																																																																		
K <sub>24</sub> (dB)	15,0	28,7	25,6	22,0	23,5	23,6	22,5	19,3																																																																		
F (Hz)	630	800	1000	1250	1600	2000	2500	3150																																																																		
K <sub>24</sub> (dB)	18,4	21,2	22,2	22,5	24,8	27,4	29,6	29,9																																																																		